




Double rope lanyard with shock absorber model 611413, manufactured from polyamide with 2 thimbles and 2 AA022 steel connectors (50 mm) at one end, an energy absorber, and an AA011 steel connector at the other end. Rope diameter of 10.5 mm and various lengths available.

**Technical features:**


- Maximum load capacity: 100 Kg
- Energy absorber and 2 thimbles
- 2 AA022 automatic closure connectors (50 mm)
- 1 AA011 screw-lock connector (17 mm)
- Rope diameter: 10.5 mm
- Available lengths: 0.9 - 1.2 - 1.5 - 2 m
- Made from polyamide
- Complies with EN 354 standard for lanyards
- Complies with EN 355 standard for energy absorbers
- CE certified

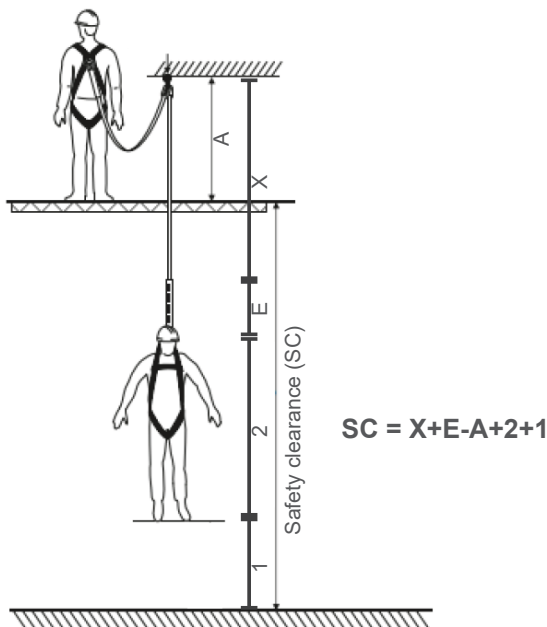

Safety clearance, valid for all fall factors and different available lengths (X) of the double rope lanyard 611413

- 1 = Safety distance (1 meter)
- 2 = Operator height (2 meters)
- E = Shock absorber elongation (máx. 1.75 meters)\*
- X = Lanyard length (meters)
- A = Height from the floor of the operator to the anchor point (meters)

\*The elongation meters will vary depending on the operator's weight and fall factor

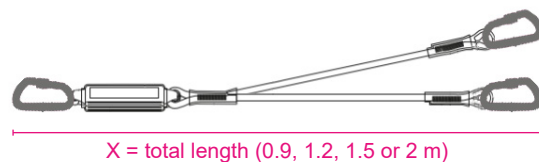

The length of the lanyard corresponds to the total in meters (connectors, absorber and length of the tape or rope), which varies for each length of the reference.



AA011 carabiner



AA022 hooks



Shock absorber