




Double elasticated webbing lanyard with shock absorber ABE-YY model 612424. Elastic core lanyard made of polyamide with thimbles at both ends, aluminium AA023 connectors (60 mm) at one end, and an energy absorber at the other end. Includes AA002 steel connector (14 mm). Available in various lengths.

Technical features:

- Maximum load capacity: 100 Kg.
- Energy absorber ABE-YY and 2 thimbles.
- 2 AA023 automatic closure connectors (60 mm).
- 1 AA002 automatic closure connector (14 mm).
- 30 mm elastic core rope made of polyamide.
- Available lengths: 2 m.
- Complies with EN 354 standard for lanyards.
- Complies with EN 355 standard for energy absorbers.
- CE certified.

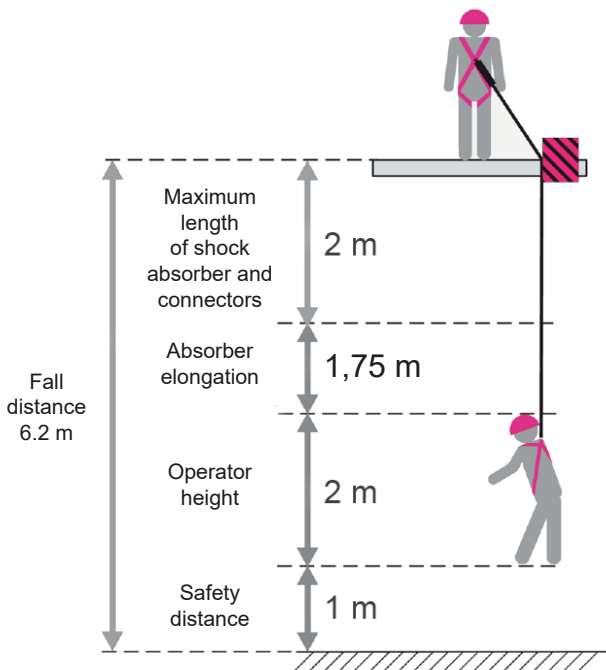

AA002 hook



AA023 hooks



ABE-YY shock absorber

