


Anchor points



Rope PVC sleeves

Webbing safety line LVT73

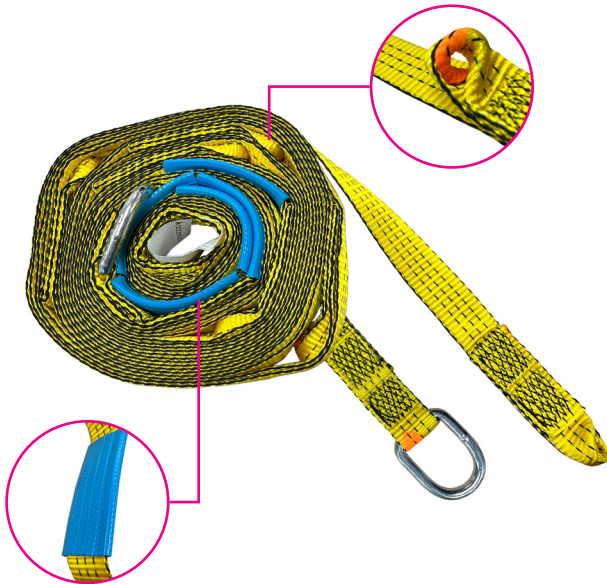

Use on site of various LVT73

TECHNICAL INFORMATION

Anchor device for vertical use, made of webbing with a steel ring on one end. Composed of multiple loops designed as anchor points and abrasion-resistant rope sleeves


Can be attached to the structure using carabiners (EN 362) and/or lashing methods.

Complies with EN 795-B standard (anchor points).

Characteristics:

- Materials: polyester webbing, galvanized steel ring, PVC rope sleeve.
- Anchoring loops every 1.5 meters.
- Lengths: 10 and 30 m.
- Individual use.
- Compatible with energy-absorbing lanyards (EN 355), carabiners (EN 362), and retractable devices (EN 360).

Installation methods:

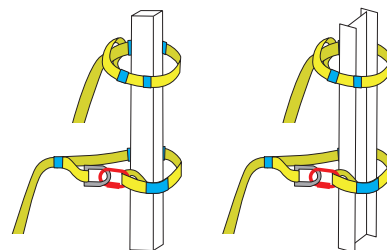

Installation by hanging or using EN 362 connector on posts or beams

Correct placement:

